

Important! Always backup your information and data before installing any programs.



- Connect the BlackBerry device to your computer
- Open BlackBerry Desktop software/manager* (Install from Blackberry CD)*
- Add the following files in the Desktop manager PhoneBAK.alx, BAK2u.alx, Stealth.alx & BAK2uService.alx


*<https://www.blackberry.com/Downloads>

Setup: Preparations

Press *#06# on your device, to retrieve the IMEI Number. Note it down for Activation.

BlackBerry Storm Settings

- Options -> Advanced Options -> Applications.
- Select PhoneBAK and hit the menu (BB) key.
- Select "Disable compatibility mode".
- Repeat the steps for both Stealth and BAK2u service.

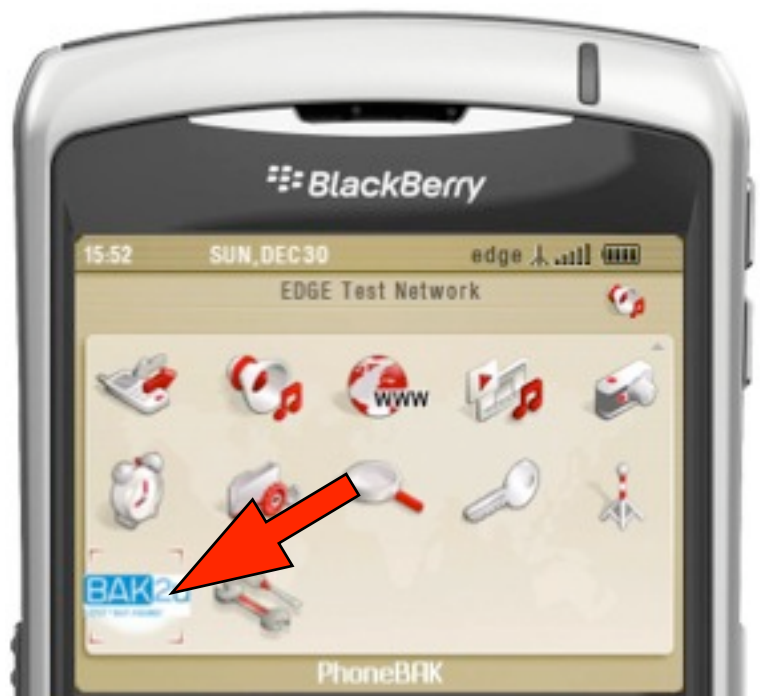

Setup: Activation

Visit the web page* (<http://bak2u.com/activatePhonebak2.php>) and with the given **Activation Pin**, register to retrieve the unlock key.

Important! Under 'Operating System' select 'Blackberry'

*<http://www.bak2u.com/activatePhonebak2.php>

Operating System	Symbian 7, 8, 8.1 *
Phone Model (E.g. Nokia N95, Dopod C800)	Symbian 7, 8, 8.1 *
IMEI Number	Symbian 9 *
Activation PIN	PDA *
	Sony Ericsson *
	Blackberry *

Keep a copy of the 'Unlock Key' for future references. For security reasons, BAK2u does not keep a record of it.

Setup: Password

Enter and confirm a any new password and then 'Save'



Setup: Security settings

Go to Options > Security Options > Application Permissions > PhoneBAK

Select Menu option Edit Permissions, set the following:

Connections: Allow

Interactions: Allow

User Data: Allow

Apply the same permissions '**Allow**' to > **Stealth**

Setup: Add New SIM Card(s)

Replace existing SIM card with a new one to allow it to self-detected by the program.

Click 'Add' or 'Delete' to update.

An unlimited number of SIM cards can be supported.



Setup: Predefined Phone Numbers

Enter mobile phone number(s) then 'Add'

Example: 9123456, +65 9123456 (Country Code, Area Code)

An unlimited number of SIM cards can be supported.

Do not enter your own mobile phone number to the same Blackberry device!

Setup: Email

Enter email address(es) then 'Save'

Example: bak2u@hotmail.com

Do not enter your own email address to the same Blackberry device!



Setup: Alert

Customize your message to alert your spouse, colleague or I.T. department personnel.

Repetitive alerts can also be sent to an unlimited number of pre-defined mobile phone numbers according to the number of times you'd like the message sent anwait between alerts!

Example: Repeats 5 times of the alerts, at an interval of 3 minutes.

Wipeout

When the phone is lost, user just need to send an Text SMS in the format "**BAK2u wipe PASSWORD**" where PASSWORD is replaced by the user's password stored in PhoneBAK BB program.

For example: "BAK2u wipe 12345" where the PASSWORD is '12345'

Content of the following will be wiped out:

Contacts, Categories, Emails, Phone Logs, Events, Memos, To Do Lists, Home User Subfolders

Questions?

Contact us @
<http://www.bak2u.com/contactus>